


# Climatic chamber Kambic KK-190 CHULT

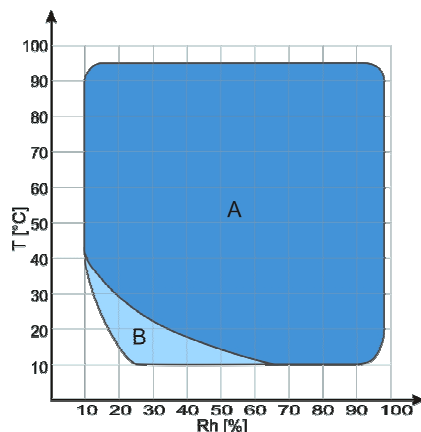

A - Standard  
B - Extended humidity range

- Medium size climatic chamber
- Temperature range -75°C ... +180°C
- Humidity range 10% ... 98%
- Optional Extended Rh range
- Dew point humidity control
- World class metrology performance
- User friendly interior design
- State of the art repeatability
- User friendly interface

## Order information

Description	Part no.
Climatic chamber KK-190 CHULT	912
USB interface	1466
Ethernet interface	1716
Shelve	953
Access port $\phi$ 50 mm	608
Access port $\phi$ 90 mm	1731

Description	Part no.
Extended Rh range	1717
Observation window with lighting	252
Monitoring and data collection software	104

## Technical Data

External dimensions (WxHxD) in mm	1040 x 1860 x 1045	Uniformity @ 50°C	$\pm 0.5$ °C (Rh = 50 %)
Internal dimensions (WxHxD) in mm	595 x 575 x 520	Control	MPC-PID
Volume (L)	190	Power supply	3 x 400 V 50/60 HZ ( $\pm 10\%$ )
Humidity range	10% ... 98%	Wattage (W)	5700
Humidity stability	$\pm 3\%$	Interface	RS 232
T & Rh display resolution	0.1°C / 1%	Weight (kg)	~ 340
Set point resolution T / Rh	0.1°C / 1%	Shelve	1 included
Temperature range (°C)	-75 ... +180	Access port	1 x $\phi$ 50 mm included
Heating rate	~ 2.2 °C/min		
Cooling rate	~ 1.5 °C/min		
Temperature range with humidity control (°C)	+ 10°C ... + 95		